



HEAT PUMPS

AIR COOLED - HEATING & COOLING UNITS - 1 THRU 5 TON

Heating and air conditioning in one system! Up to 3X the amount of heat produced per watt versus electric heat. Heat Pumps are perfect for year-round use. Safe and convenient to install with no hot surfaces. Our air-cooled heat pumps supply 100% safe, quiet, and efficient heat. They are very popular in hospitals, waiting areas, day cares, retail stores, office settings or anywhere where you have a cool spot and safety is a concern. UL and CSA certified!


MODEL	CAPACITY COOLING	CAPACITY HEATING	VOLTAGE /PHASE	RUNNING AMPS	BREAKER AMPS	NEMA PLUG	DIMENSIONS W x D x H	WEIGHT/ SHIPPING WT
2OACH1211	11,800.	11,000	115/1	10.4	15	5-15P	20 x 25 x 38	180/200
CLIMATE PRO 12	10,200	9,900	115/1	11.1/11.3	15	5-15P	21 x 27 x 44	196/238
CLIMATE PRO D12	11,450	9,900	115/1	12.1/13.3	15	5-15P	22 x 27 x 47	181/218
2OACH1811	16,800	15,600	115/1	14.1	20	5-20P	24 x 30 x 46	260/285
CLIMATE PRO 18	14,600	13,700	115/1	14.1/14.7	20	5-20P	21 x 27 x 49	214/257
CLIMATE PRO D18	15,500	13,100	115/1	15.1/15.8	20	5-20P	22 x 27 x 51	198/236
2OACH2412	24,020	22,000	208/230/1	14.9	20	6-20P	24 x 30 x 46	260/285
2OACH3612	36,050	32,500	208/230/1	19.6	30	6-30P	27.5 x 35 x 50.25	365/405
2OACH3632	36,050	32,500	208/230/3	17.2	30	L15-30P	27.5 x 35 x 50.25	365/405
2OACH3634	36,050	32,500	460/3	8.7	20	L16-20P	27.5 x 35 x 50.25	400/440
2OACH6012	60,100	53,500	208/230/1	32.0	50	6-50P	27.5 x 39.5 x 51.75	485/525
2OACH6032	60,100	53,500	208/230/3	20.4	30	L15-30P	27.5 x 39.5 x 51.75	485/525
2OACH6034	60,100	53,500	460/3	14.8	20	L16-20P	27.5 x 39.5 x 51.75	520/560

WATER COOLED – HEATING AND COOLING EQUIPMENT

Heating and AC in one Stainless Steel Cabinet! May be used as the primary source of heating. Perfect for year-round use. Easy hookup and convenient to install in the tightest locations. Water-cooled heat pumps supply 100% safe, efficient heating. They are very popular in laboratories, waiting areas, hospitals, office settings or wherever heat is needed. UL and CSA approved!

MODEL	CAPACITY COOLING	CAPACITY HEATING	VOLTAGE /PHASE	RUNNING AMPS	BREAKER AMPS	NEMA PLUG	DIMENSIONS W x D x H	SHIPPING WT
5WK07	6,300	7,000	115/1	9.2	15	5-15P	17.6 x 22.4 x 12	89
5WK14	10,800	12,200	115/1	11.6	15	5-15P	31.5 x 25 x 10.2	131
5WK18	16,100	19,100	208-230/1	6.6	15	6-15P	28.8 x 36 x 12.3	202
5WK26	23,000	27,300	208-230/1	10.0	15	6-15P	28.8 x 36 x 12.3	204

PLUG CONFIGURATION

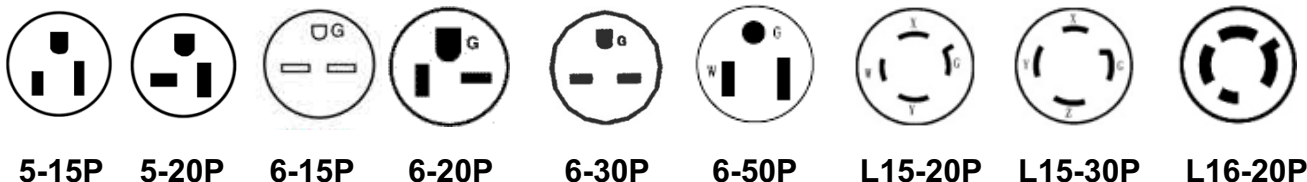

Call (888)519-1422 On Call 24/ 7

Serving the Midwest

EMAIL: info@porta-air.com

www.porta-air.com

